

SCG Terracota Roof Tiles


SCG Terracotta Roof Tile is a clay tile fired at very high temperature of 1,100 o C to make it exceptionally strong and able to support weight well. By maintaining constant high temperature over 36 hours, the color is well absorbed into the tiles resulting in long lasting color on the roof - just like the antique Chinese ceramics or the fired bricks from the ancient civilization which kept their colors over hundreds of years. On the contrary, coating materials such as paints will fade away after a few years. Moreover, you can design your own mix for Ceris to differentiate yourself or select from a variety of readily available mixed tone.

Magnificent Natural Aesthetics and Coolness
From superior natural clay resources, our well selected materials contribute to quality SCG Terracoata Roof Tiles. The unique product characteristics consist of a high rolled European profile and earth tone colors. These features do not only provide functional benefits but also enhance senses of beauty to your roof. In addition, one of clay attributes is low thermal conductivity and SCG Terracota Roof Tiles is low as 0.8-0.9 W/m.K which is lower than other roofing products available in the market.


Simple Installation and Leakage Protection
H+G”Duo Tech” is our recent production technology of SCG Terracotta Roof Tiles which includes H-Cassete and Gypsum Mold. This innovation together with standardized processes ensure tile surfaces smoothness, dimension consistency and high definition locking system contributing to fast, easy and less time consuming installation and worry-free from leakages.

Excellent Strength and Color Durability
A high and consistent temperature level during firing process makes SCG Terracotta Roof Tile strong and resist to heavy load. Besides, both natural and matt finished colors will last as long as ancient ceramic pottery produced hundred years ago.

SCG Terracotta Specification



Specification	
Dimension (cm.)	29 x 45 x 7cm
No. of pcs per m2	11 m2
Weight (kg.)	3.9kg
Roof pitch	17°-60°
Batten space (cm.)	38cm

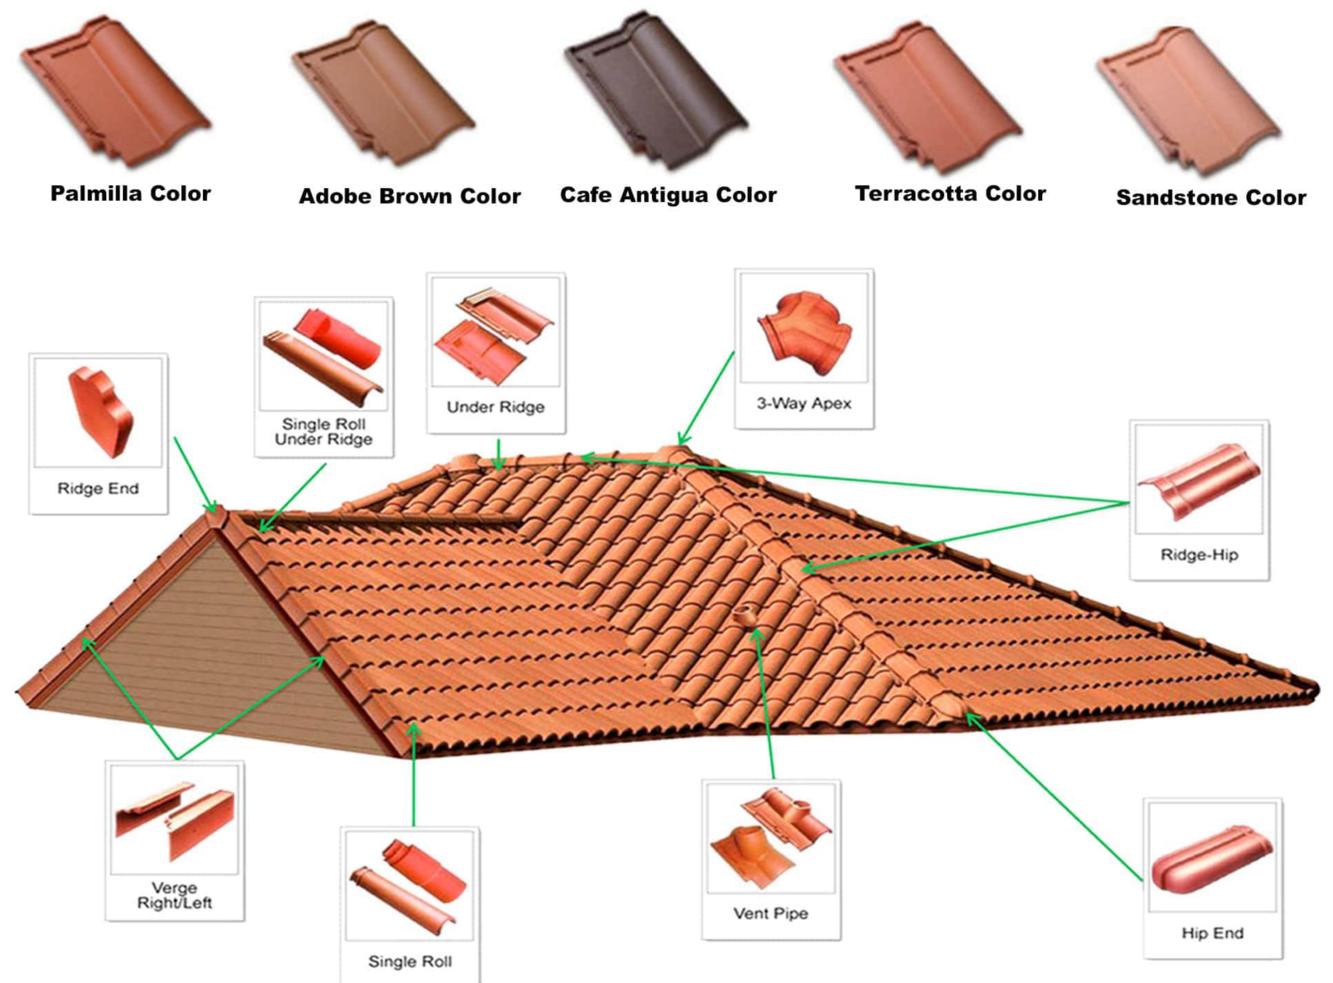

Interline (B) Sdn Bhd.

Lot 56, 57, 58 & 59 Beribi Industrial Complex II BE 1118 Gadong, P.O. Box 520 Postal Code BE 3978 Bandar Seri Begawan - Brunei Darussalam

Telp (673) 2448721-24 Fax (673) 2448725 / (673) 8227788 - Whatsapp Only - Email : info@interline-asia.com